




OMICRON TWIN 16500(H) PN16

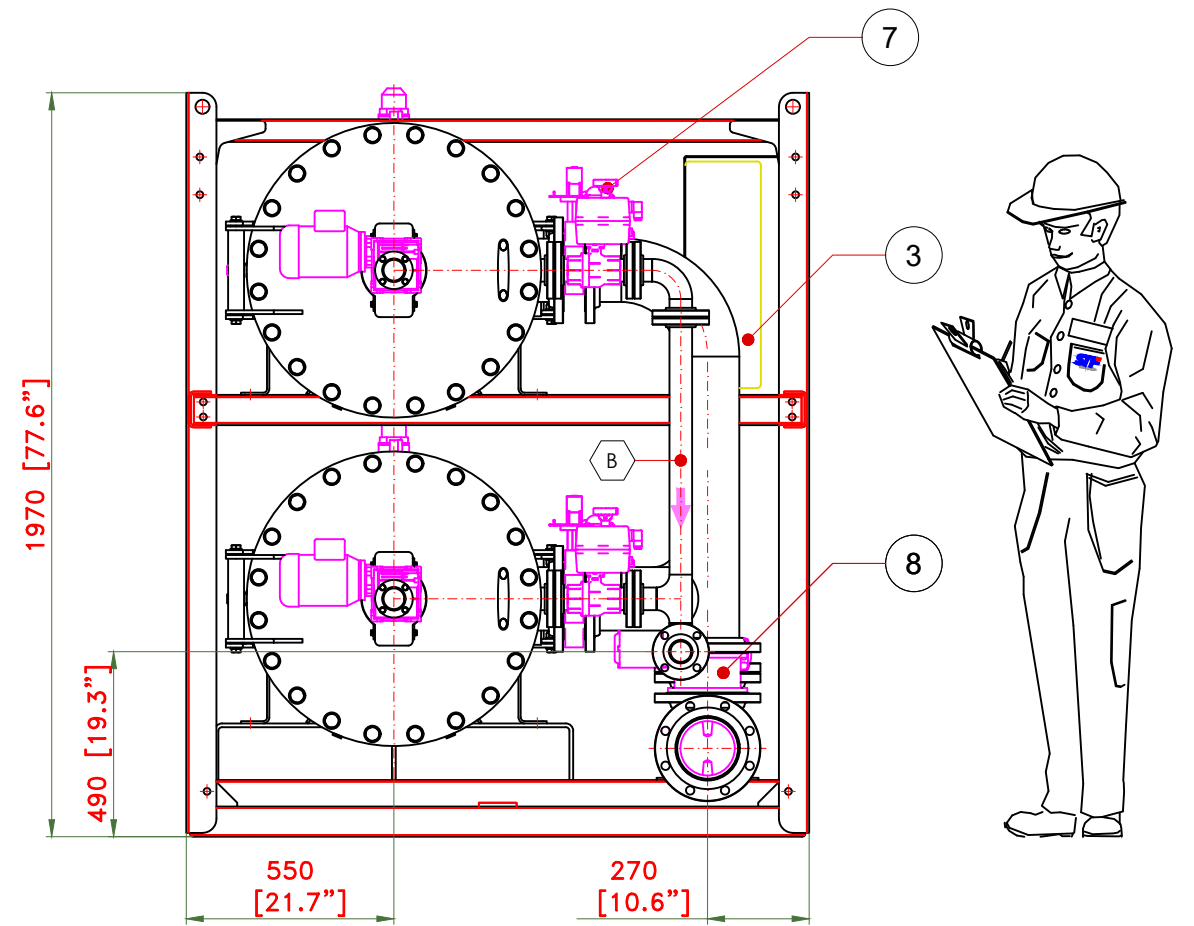

Total length including clearances: 3850 [151.6]
3020 [118.9"]

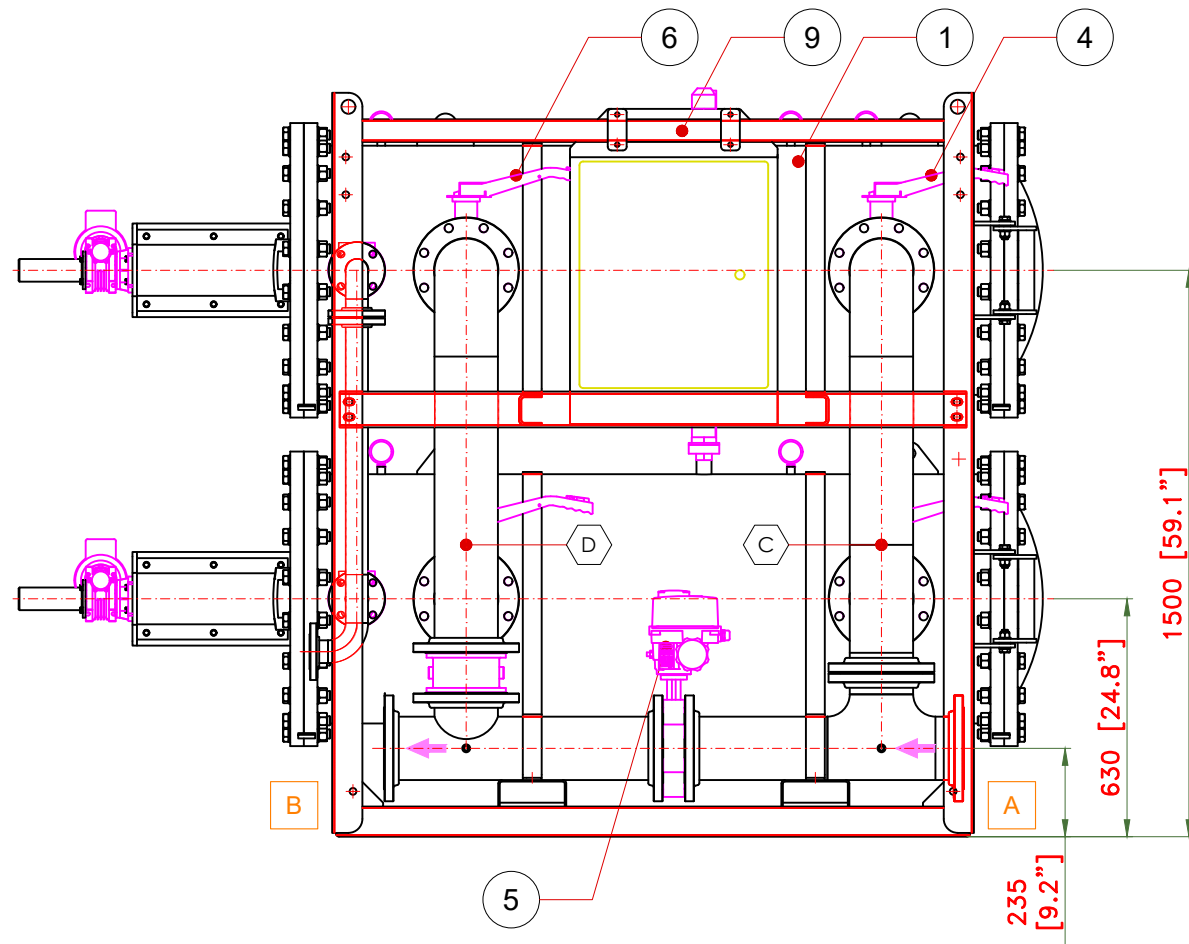

ITEM	LINE	CONNEXION
A	RAW WATER INLET	6"-150# ANSI
B	FILTERED WATER OUTLET	6"-150# ANSI
C	BACKWASH OUTLET	2"-150# ANSI

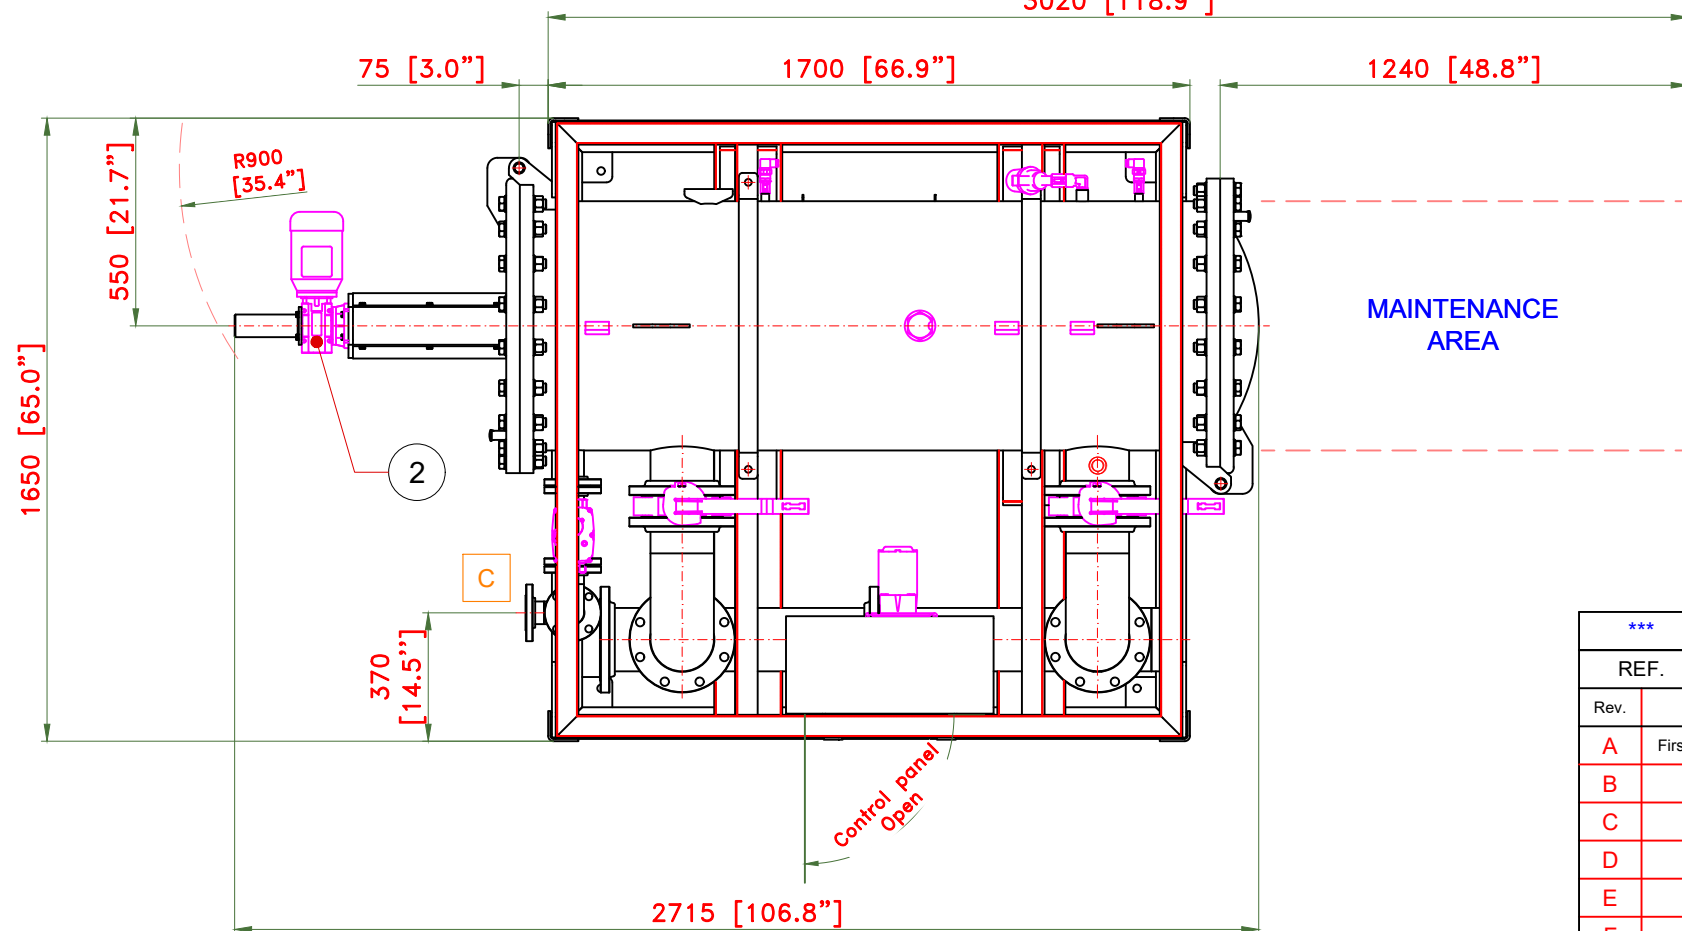

ITEM	DESIGNATION	QUANT.	MATERIAL	OBSERVATIONS
1	AUTOMATIC FILTER: FMA-2012 WITH INLET / OULET NOZZLES 6"-150lbs	2	S-275-JR	
2	ELECTRIC MOTOR	2	...	
3	CONTROL PANEL DIMENSIONS: 600 x 500 x 200	1	...	
4	WAFER BUTTERFLY VALVE 6" - 150Lbs	2	IRON CAST AISI 316L DISC	RAW WATER INLET INTERAPP 150# NSF
5	WAFER BUTTERFLY VALVE 6" - 150Lbs FAIL SAFE / ELECTRIC VALVE	1	IRON CAST AISI 316L DISC	BY-PASS
6	WAFER BUTTERFLY VALVE 6" - 150Lbs	2	IRON CAST AISI 316L DISC	FILTERED WATER OUTLET INTERAPP 150# NSF
7	BACKWASH VALVE 2" - FLANGED L = 180 - ELECTRIC	2	AISI-316L	BACKWASH OUTLET
8	WAFER CHECK VALVE 6" - 150 Lbs GENEBRE ref. 2528A 2" ANSI	1	AISI-316L	L = 106
9	SKID	1	S-275-JR	

REF.	ITEM	QUANTITY	MATERIAL	WEIGHT	OBSERVATIONS
***	2 OMICRON 16500 WITH MANIFOLDS	1	S-275-JR	***	***
Rev.	Modification	Date	Name	Signed	CLIENT: OMICRON WATER TECHNOLOGIES
A	First edition	21/04/21	G.A.R.		Scale: 1:20
B					Format: A3
C					DESCRIPTION: OMICRON TWIN 16500(H)
D					WORK ORDER: 70778
E					N° DRAWING: 21.70778.00.00
F					Projection:
					Date: 21/04/21
					Name: G.A.R.
					Signed:
					Approved:

